


Built-In Receiver

1. Turn off power at the breaker. ⚡
2. Carefully bring the fan motor down and remove the top housing.
3. Remove the motor's top cover (usually 4-6 screws).
4. Unplug the old receiver's 9-pin connector plug.
5. Disconnect the old receiver's blue and white wires (will be connected with 1-pin plugs or wire crimps).
6. Remove the two screws holding the receiver in place.
7. The defective receiver can now be removed.
8. Install the new receiver using the diagram below for reference.
9. Re-install the entire ceiling fan.
10. ⚠️ Ensure the receiver's dipswitch code matches the remote. ⚠️

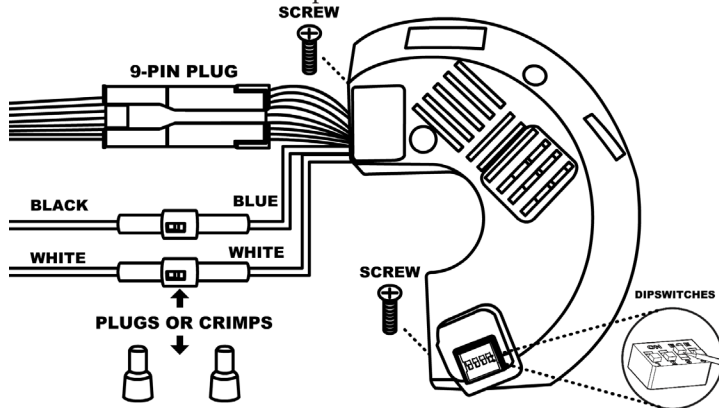

⚡ Warning: Risk of Electric Shock. Damaged parts may discharge; handle with care or contact an electrician. ⚡

Canopy Receiver

1. Turn off power at the breaker. ⚡
2. Disassemble the canopy on top of the fan to access the receiver.
3. Unwire the defective receiver and remove from the canopy.
4. Copy the dipswitch code from the defective receiver onto the replacement receiver.
5. Wire the replacement receiver using the owner's manual's diagram.
6. Secure the wire nuts with electrical tape.
7. Slide the receiver into the hanger bracket with the flat side facing up.
8. Re-install the canopy and restore power to the breaker.
9. ⚠️ Ensure the receiver's dipswitch code matches the remote. ⚠️

